asber

Grand Series

Pass-through dishwashers

Catalogue

NEW Pass-Through dishwashers
Features

Anti-friction guides

Lifts smoothly and easily with no tight spots, thereby reducing operator fatigue and increasing productivity.



Hinged rack support

Facilitates cleaning.

Large opening

440 mm hood opening permits washing GN 1/1 containers and big size dishes or glasses.



Double filtering

With progressively decreasing mesh size, traps dirt during washing and emptying.

Press-moulded tank

The wash chamber is free of internal pipes and sharp corners.

Perimetral handle

Facilities operation without buckling or jamming if the handle is grasped from a corner.



Multi-Power and Multi-Voltage

Selectable heating power and voltage at the installation.



Powerfull washing pump

Permits optimum cleaning results.

Electronic interface on hood (U) – Supreme range

Control panel at eye level to improve ergonomics and productivity.

Double skin hood – option (P)

With thermally-acoustically insulated hood. Helps soundproof the machine, creating a quieter work environment and reducing the heat loss.

Heat recovery (RC) – option

Collects and condenses the steam released by the machine after a full wash cycle and heats the inlet water by between 10 and 25 °C, improving its energy efficiency.

Pass-Through dishwashers
Easy Line

GEX-H500

500x500

Lower washing and rinsing arms
+ composite material filter

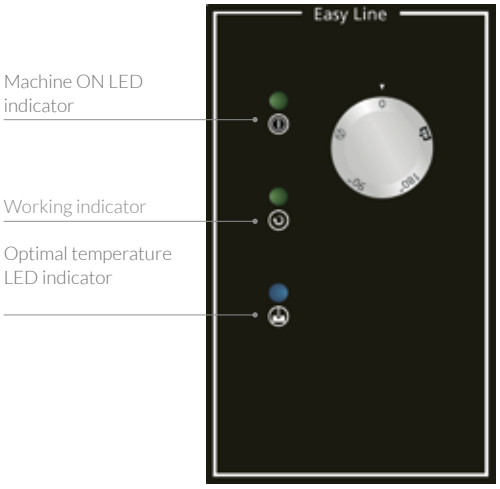

Control Panel

GEX-H500

- Electromechanical control panel.
- 2 washing cycle of 90"/180".
- Tank capacity: 33 l./Heating power: 4.5 kW.
- Boiler capacity: 7 l./Heating power: 6.0 kW.
- Wash pump power: 0.75 kW.
- Rinsing consumption: 2.6 l/rinse.
- Upper and lower washing and rinsing arms.
- Stainless steel washing arms.
- Built-in rinse-aid dispenser.
- Anti backflow valve fitted.
- Tank filter in composite material.
- Single skin hood.
- Safety thermostat in washing tank and boiler.
- Temperature adjustement: wash 60 °C and rinse 85 °C.
- Multi-Voltage: 400 V 3N, 230 V 3~, 230 V 1N.
- Adjustable boiler heating power (Multi-Power).
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 basket for cutlery CU-7.

OPTIONAL MODELS WITH
- Double skin hood.
- Built-in drain pump.
- Built-in electric rinse-aid dispenser.
- Built-in detergent dispenser.
- Wash tank stainless steel filter.
- Stainless steel rinsing arms.
- 60 Hz version.

Model	Reference	Baskets/hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Power (kW)	Voltage (V)
GEX-H500	**19104672**	40	440	630 x 750 x 1482	No	No	11.25	400 V 3N 50 Hz
GEX-H500 DD	**19104673**	40	440	630 x 750 x 1482	Yes	No	11.25	400 V 3N 50 Hz
GEX-H500 B	**19104674**	40	440	630 x 750 x 1482	No	Yes	11.25	400 V 3N 50 Hz
GEX-H500 B DD	**19104675**	40	440	630 x 750 x 1482	Yes	Yes	11.25	400 V 3N 50 Hz

500x500

GEX-H510

Lower washing and rinsing arms
+ composite material filter

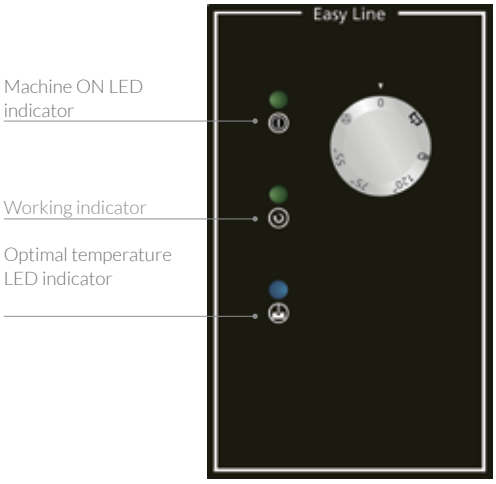

Control Panel

GEX-H510

- Electromechanical control panel.
- 3 washing cycles: 55"/75"/120".
- Continuous cycle up to the manual stop.
- Tank capacity: 33 l./Heating power: 4.5 kW.
- Boiler capacity: 7 l./Heating power: 9.0 kW.
- Wash pump power: 0.75 kW.
- Rinsing consumption: 2.6 l/rinse.
- Upper and lower washing and rinsing arms.
- Stainless steel washing arms.
- Built-in rinse-aid dispenser.
- Anti backflow valve fitted.
- Tank filter in composite material.
- Single skin hood.
- Safety thermostat in washing tank and boiler.
- Temperature adjustement: wash 60 °C and rinse 85 °C.
- Multi-Voltage: 400 V 3N, 230 V 3~, 230 V 1N.
- Adjustable boiler heating power (Multi-Power).
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 basket for cutlery CU-7.

OPTIONAL MODELS WITH
- Double skin hood.
- Built-in drain pump.
- Built-in electric rinse-aid dispenser.
- Built-in detergent dispenser.
- Wash tank stainless steel filter.
- Stainless steel rinsing arms.
- 60 Hz version.

Model	Reference	Baskets/hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Power (kW)	Voltage (V)
GEX-H510	**19104676**	65	440	630 x 750 x 1482	No	No	14.25	400 V 3N 50 Hz
GEX-H510 DD	**19104677**	65	440	630 x 750 x 1482	Yes	No	14.25	400 V 3N 50 Hz
GEX-H510 B	**19104678**	65	440	630 x 750 x 1482	No	Yes	14.25	400 V 3N 50 Hz
GEX-H510 B DD	**19104679**	65	440	630 x 750 x 1482	Yes	Yes	14.25	400 V 3N 50 Hz

GMX-H500

500x500

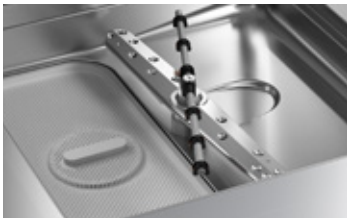

Lower washing and rinsing arms
+ composite material filter

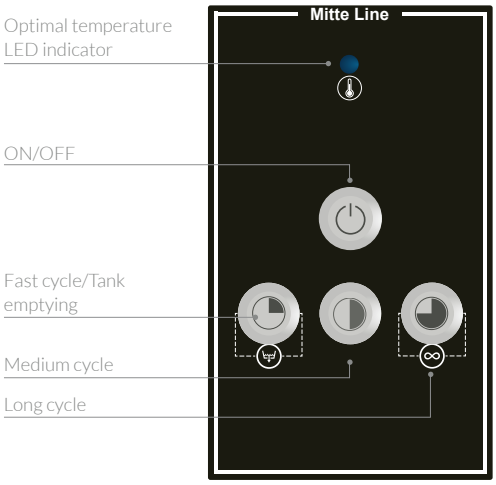

Control panel

GMX-H500

- Electronic control panel.
- 3 washing cycles: 90"/120"/180".
- Continuous cycle up to the manual stop.
- Tank capacity: 33 l./Heating power: 4.5 kW.
- Boiler capacity: 7 l./Heating power: 6.0 kW.
- Wash pump power: 0.75 kW.
- Rinsing consumption: 2.6 l/rinse.
- Upper and lower washing and rinsing arms.
- Stainless steel washing arms.
- Thermostop function.
- Built-in rinse-aid dispenser.
- Anti backflow valve fitted.
- Tank filter in composite material.
- Single skin hood.
- Safety thermostat in washing tank and boiler.
- Temperature adjustement: wash 60 °C and rinse 85 °C.
- Multi-Voltage: 400 V 3N, 230 V 3~, 230 V 1N.
- Adjustable boiler heating power (Multi-Power).
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 basket for cutlery CU-7.

OPTIONAL MODELS WITH
- Double skin hood.
- Built-in drain pump.
- Built-in anti-backflow air gap system and rinse pump.
- Built-in electric rinse-aid dispenser (set up as default in W models).
- Built-in detergent dispenser.
- Wash tank stainless steel filter.
- Stainless steel rinsing arms.
- 60 Hz version.

Model	Reference	Baskets/ hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Rinse pump	Power (kW)	Voltage (V)
GMX-H500	**19106957**	40	440	630 x 750 x 1482	No	No	No	11.25	400 V 3N 50 Hz
GMX-H500 DD	**19106959**	40	440	630 x 750 x 1482	Yes	No	No	11.25	400 V 3N 50 Hz
GMX-H500 B	**19106970**	40	440	630 x 750 x 1482	No	Yes	No	11.25	400 V 3N 50 Hz
GMX-H500 B DD	**19106971**	40	440	630 x 750 x 1482	Yes	Yes	No	11.25	400 V 3N 50 Hz
GMX-H500 W	**19106972**	40	440	630 x 750 x 1482	No	No	Yes	11.25	400 V 3N 50 Hz
GMX-H500 W DD	**19106973**	40	440	630 x 750 x 1482	Yes	No	Yes	11.25	400 V 3N 50 Hz
GMX-H500 B W	**19106974**	40	440	630 x 750 x 1482	No	Yes	Yes	11.25	400 V 3N 50 Hz
GMX-H500 B W DD	**19106975**	40	440	630 x 750 x 1482	Yes	Yes	Yes	11.25	400 V 3N 50 Hz

500x500

Lower washing and rinsing arms
+ composite material filter

GMX-H510

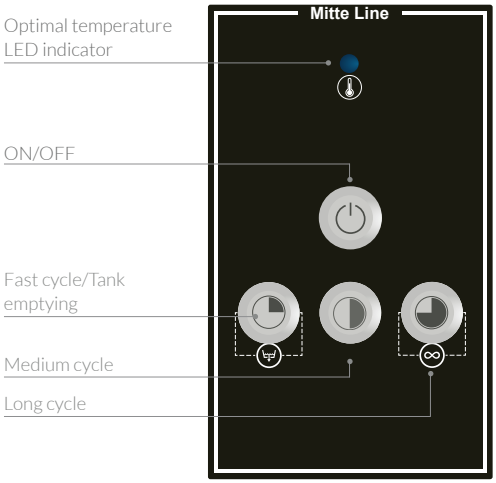

Control panel

GMX-H510

- Electronic control panel.
- 3 washing cycles: 55"/75"/120".
- Continuous cycle up to the manual stop.
- Tank capacity: 33 l./Heating power: 4.5 kW.
- Boiler capacity: 7 l./Heating power: 9.0 kW.
- Wash pump power: 0.75 kW.
- Rinsing consumption: 2.6 l/rinse.
- Upper and lower washing and rinsing arms.
- Stainless steel washing arms.
- Thermostop function.
- Built-in rinse-aid dispenser.
- Anti backflow valve fitted.
- Tank filter in composite material.
- Single skin hood.
- Safety thermostat in washing tank and boiler.
- Temperature adjustement: wash 60 °C and rinse 85 °C.
- Multi-Voltage: 400 V 3N, 230 V 3~, 230 V 1N.
- Adjustable boiler heating power (Multi-Power).
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 basket for cutlery CU-7.

OPTIONAL MODELS WITH

- Double skin hood.
- Built-in drain pump.
- Built-in anti-backflow air gap system and rinse pump.
- Built-in electric rinse-aid dispenser (set up as default in W models).
- Built-in detergent dispenser.
- Wash tank stainless steel filter.
- Stainless steel rinsing arms.
- 60 Hz version.

Model`	Reference	Baskets/ hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Rinse pump	Power (kW)	Voltage (V)
GMX-H510	**19106977**	65	440	630 x 750 x 1482	No	No	No	14.25	400 V 3N 50 Hz
GMX-H510 DD	**19106979**	65	440	630 x 750 x 1482	Yes	No	No	14.25	400 V 3N 50 Hz
GMX-H510 B	**19106980**	65	440	630 x 750 x 1482	No	Yes	No	14.25	400 V 3N 50 Hz
GMX-H510 B DD	**19106981**	65	440	630 x 750 x 1482	Yes	Yes	No	14.25	400 V 3N 50 Hz
GMX-H510 W	**19106982**	65	440	630 x 750 x 1482	No	No	Yes	14.25	400 V 3N 50 Hz
GMX-H510 W DD	**19106983**	65	440	630 x 750 x 1482	Yes	No	Yes	14.25	400 V 3N 50 Hz
GMX-H510 B W	**19106984**	65	440	630 x 750 x 1482	No	Yes	Yes	14.25	400 V 3N 50 Hz
GMX-H510 B W DD	**19106985**	65	440	630 x 750 x 1482	Yes	Yes	Yes	14.25	400 V 3N 50 Hz

Pass-Through dishwashers
Tech Line

GTX-H500

500x500

Lower washing and rinsing arms
+ composite material filter

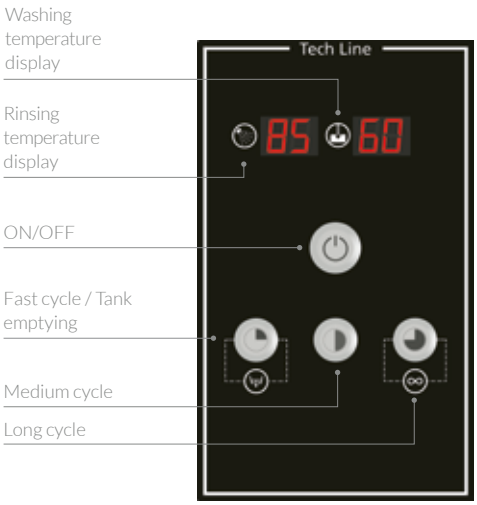

Control Panel

GTX-H500

- Electronic control panel.
- 3 washing cycles: 90" / 120" / 180".
- Continuous cycle up to the manual stop.
- Tank capacity: 33 l. / Heating power: 4.5 kW.
- Boiler capacity: 7 l. / Heating power: 6.0 kW.
- Wash pump power: 0.75 kW.
- Rinsing consumption: 2.6 l/rinse.
- Upper and lower washing and rinsing arms.
- Stainless steel washing arms.
- Thermostop function.
- Wash tank and boiler temperature display.
- Built-in rinse-aid dispenser.
- Anti backflow valve fitted.
- Tank filter in composite material.
- Single skin hood.
- Safety thermostat in washing tank and boiler.
- Temperature adjustement: wash 60 °C and rinse 85 °C.
- Multi-Voltage: 400 V 3N, 230 V 3~, 230 V 1N.
- Adjustable boiler heating power (Multi-Power).
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 basket for cutlery CU-7.

OPTIONAL MODELS WITH
- Heat recovery.
- Double skin hood.
- Built-in drain pump.
- Built-in anti-backflow air gap system and rinse pump.
- Built-in electric rinse-aid dispenser (set up as default in W models).
- Built-in detergent dispenser.
- Wash tank stainless steel filter.
- Stainless steel rinsing arms.
- 60 Hz version.

Model	Reference	Baskets / hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Rinse pump	Heat recovery	Power (kW)	Voltage (V)
GTX-H500	**19104750**	40	440	630 x 750 x 1482	No	No	No	No	11.25	400 V 3N 50 Hz
GTX-H500 DD	**19104751**	40	440	630 x 750 x 1482	Yes	No	No	No	11.25	400 V 3N 50 Hz
GTX-H500 B	**19104752**	40	440	630 x 750 x 1482	No	Yes	No	No	11.25	400 V 3N 50 Hz
GTX-H500 B DD	**19104753**	40	440	630 x 750 x 1482	Yes	Yes	No	No	11.25	400 V 3N 50 Hz
GTX-H500 W	**19104754**	40	440	630 x 750 x 1482	No	No	Yes	No	11.25	400 V 3N 50 Hz
GTX-H500 W DD	**19104755**	40	440	630 x 750 x 1482	Yes	No	Yes	No	11.25	400 V 3N 50 Hz
GTX-H500 B W	**19104756**	40	440	630 x 750 x 1482	No	Yes	Yes	No	11.25	400 V 3N 50 Hz
GTX-H500 B W DD	**19104757**	40	440	630 x 750 x 1482	Yes	Yes	Yes	No	11.25	400 V 3N 50 Hz

500x500

Lower washing and rinsing arms
+ composite material filter

GTX-H510

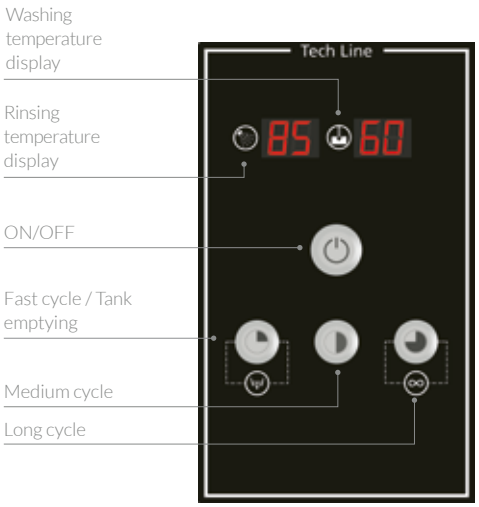

Control Panel

GTX-H510

- Electronic control panel.
- 3 washing cycles: 55" / 75" / 120".
- Continuous cycle up to the manual stop.
- Tank capacity: 33 l. / Heating power: 4.5 kW.
- Boiler capacity: 7 l. / Heating power: 9.0 kW.
- Wash pump power: 0.75 kW.
- Rinsing consumption: 2.6 l/rinse.
- Upper and lower washing and rinsing arms.
- Stainless steel washing arms.
- Thermostop function.
- Wash tank and boiler temperature display.
- Built-in rinse-aid dispenser.
- Anti backflow valve fitted.
- Tank filter in composite material.
- Single skin hood.
- Safety thermostat in washing tank and boiler.
- Temperature adjustement: wash 60 °C and rinse 85 °C.
- Multi-Voltage: 400 V 3N, 230 V 3~, 230 V 1N.
- Adjustable boiler heating power (Multi-Power).
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 basket for cutlery CU-7.

OPTIONAL MODELS WITH

- Heat recovery.
- Double skin hood.
- Built-in drain pump.
- Built-in anti-backflow air gap system and rinse pump.
- Built-in electric rinse-aid dispenser (set up as default in W models).
- Built-in detergent dispenser.
- Wash tank stainless steel filter.
- Stainless steel rinsing arms.
- 60 Hz version.

Model	Reference	Baskets / hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Rinse pump	Heat recovery	Power (kW)	Voltage (V)
GTX-H510	**19104758**	65	440	630 x 750 x 1482	No	No	No	No	14.25	400 V 3N 50 Hz
GTX-H510 DD	**19104759**	65	440	630 x 750 x 1482	Yes	No	No	No	14.25	400 V 3N 50 Hz
GTX-H510 B	**19104760**	65	440	630 x 750 x 1482	No	Yes	No	No	14.25	400 V 3N 50 Hz
GTX-H510 B DD	**19104761**	65	440	630 x 750 x 1482	Yes	Yes	No	No	14.25	400 V 3N 50 Hz
GTX-H510 W	**19104762**	65	440	630 x 750 x 1482	No	No	Yes	No	14.25	400 V 3N 50 Hz
GTX-H510 W DD	**19104763**	65	440	630 x 750 x 1482	Yes	No	Yes	No	14.25	400 V 3N 50 Hz
GTX-H510 B W	**19104764**	65	440	630 x 750 x 1482	No	Yes	Yes	No	14.25	400 V 3N 50 Hz
GTX-H510 B W DD	**19104765**	65	440	630 x 750 x 1482	Yes	Yes	Yes	No	14.25	400 V 3N 50 Hz

500x500

GSX-H510

Lower washing and rinsing arms
+ composite material filter with basket filter

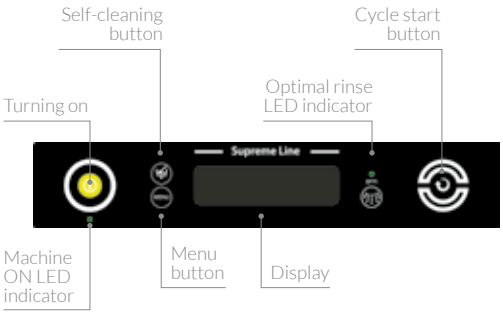

Control Panel

GSX-H510

- Electronic control panel.
- 4 washing cycles of 55"/75"/120"/480".
- Specific glass washing cycle in compliance with DIN10511.
- Additional self-cleaning program.
- Tank capacity: 28 l. / Heating power: 2.1 kW.
- Boiler capacity: 7 l. / Heating power: 9.0 kW.
- Wash pump power: 0.75 kW.
- Rinsing consumption: 2.6 l/rinse.
- Upper and lower washing and rinsing arms.
- Stainless steel washing arms.
- Thermostop function.
- Built-in electric rinse-aid dispenser.
- Built-in drain pump.
- Built-in anti-backflow air gap system and rinse pump.
- Tank filter in composite material.
- Double skin hood.
- Electronic interface on hood.
- Safety thermostat in washing tank and boiler.
- Temperature adjustement: wash 60 °C and rinse 85 °C.
- Multi-Voltage: 400 V 3N, 230 V 3~, 230 V 1N.
- Adjustable boiler heating power (Multi-Power).
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 basket for cutlery CU-7.
- Water inlet temperature min.-max. in RC models: 15-25 °C.

OPTIONAL MODELS WITH
- Heat recovery.
- Built-in water softener.
- Wash tank stainless steel filter.
- Stainless steel rinsing arms.
- 60 Hz version.

Model	Reference	Baskets / hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Rinse pump	Water Softener	Heat recovery	Power (kW)	Voltage (V)
GSX-H510 P U B W DD	**19104766**	65	440	630 x 750 x 1547	Yes	Yes	Yes	No	No	11.85	400 V 3N 50 Hz
GSX-H510 SOFT P U B W DD	**19104767**	65	440	630 x 750 x 1547	Yes	Yes	Yes	Yes	No	11.85	400 V 3N 50 Hz

PASS-THROUGH DISHWASHERS

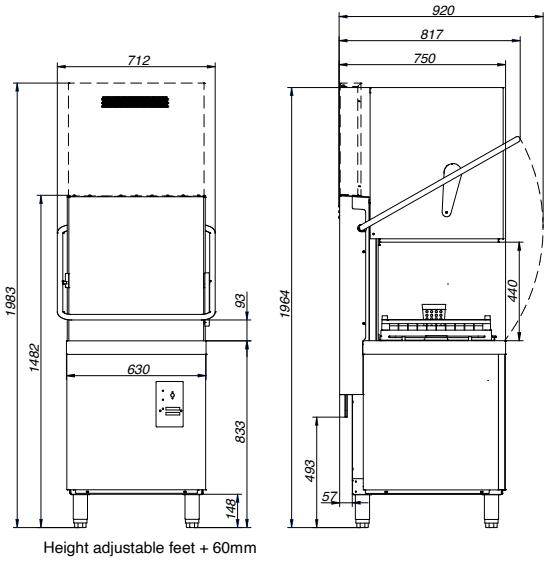

Easy/Mitte/Tech model

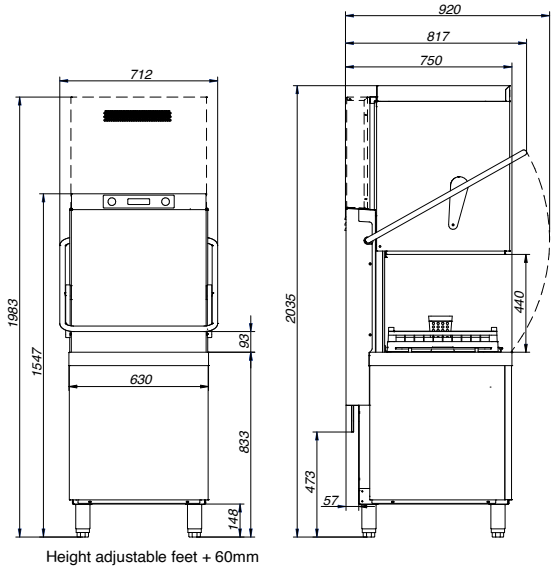

Supreme model

Multi-power and multi-voltage

Model	Voltage	Standard configuration	Fuse protection (A)	Total Amperage (A)	Total connected load (kW)	Connection (simulta-neous/ alternete)	Tank power (kW)	Boiler power (kW)	Wash pump power (kW)
GEX-H500 GMX-H500 GTX-H500	380 V-415 V / 3N~		16	11.3	6.75	ALT	4.5	6	0.75
	380 V-415 V / 3N~	x	20	17.8	11.25	SIM	4.5	6	0.75
	220 V-240 V / 1N~		20	15.7	3.75	ALT	2.25	3	0.75
	220 V-240 V / 1N~		25	20	4.75	ALT	3	4	0.75
	220 V-240 V / 1N~		32	28.7	6.75	ALT	4.5	6	0.75
	220 V-240 V / 1N~		32	25.7	6.05	SIM	2.25	3	0.75
	220 V-240 V / 1N~		40	33	7.75	SIM	3	4	0.75
	220 V-240 V / 1N~		50	48.3	11.25	SIM	4.5	6	0.75
	230 V / 3~		20	17.7	6.75	ALT	4.5	6	0.75
	230 V / 3~		32	29	11.25	SIM	4.5	6	0.75
GEX-H510 GMX-H510 GTX-H510	380 V-415 V / 3N~		20	15.7	9.75	ALT	4.5	9	0.75
	380 V-415 V / 3N~	x	25	22.2	14.25	SIM	4.5	9	0.75
	220 V-240 V / 1N~		25	22.2	5.25	ALT	2.3	4.5	0.75
	220 V-240 V / 1N~		32	28.7	6.75	ALT	3	6	0.75
	220 V-240 V / 1N~		50	41.8	9.-75	ALT	4.5	9	0.75
	220 V-240 V / 1N~		40	32	7.55	SIM	2.3	4.5	0.75
	220 V-240 V / 1N~		50	41.8	9.75	SIM	3	6	0.75
	230 V / 3~		32	25.2	9.75	ALT	4.5	9	0.75
	230 V / 3~		40	36.5	14.25	SIM	4.5	9	0.75
GSX-H510	380 V-415 V / 3N~	x	20	18.7	11.85	SIM	2.1	9	0.75
	220 V-240 V / 1N~		32	26.7	6.35	SIM	1.1	4.5	0.75
	220 V-240 V / 1N~		40	34.8	8.15	SIM	1.4	6	0.75
	230 V / 3~		40	30.5	11.85	SIM	2.1	9	0.75

Optionals

	GEX-H500	GEX-H510	GMX-H500	GMX-H510	GTX-H500	GTX-H510	GSX-H510
Heat recovery (RC) (1)	-	-	-	-	●	●	●
Double skin hood (P)	●	●	●	●	●	●	standard
Built-in drain pump (B)	●	●	●	●	●	●	standard
Built-in anti-backflow air gap system and rinse pump (W) (2) (5)	-	-	●	●	●	●	standard
Built-in water softener (SOFT) (5)	-	-	-	-	-	-	●
Built-in detergent dispenser (DD)	●	●	●	●	●	●	standard
Built-in rinse-aid dispenser	standard	standard	standard	standard	standard	standard	-
Built-in electric rinse-aid dispenser (RD) (3)	●	●	●	●	●	●	standard
Wash tank Stainless steel filter (F) (4)	●	●	●	●	●	●	●
Stainless steel washing arms (SA)	standard	standard	standard	standard	standard	standard	standard
Stainless steel rinsing arms (SA)	●	●	●	●	●	●	●
60 Hz version	●	●	●	●	●	●	●
UK version	-	-	-	-	-	-	-

(1) Water inlet temperature min.-max. in RC models: 15-25 °C. The machine with RC is 1983 mm high.
(2) Built-in anti-backflow air gap system and rinse pump (W) is not compatible with water softener (SOFT) versions.
(3) Standard in versions with rinse pump (W).
(4) Water softener version is not compatible with stainless steel filters
(5) Cold rinsing (COLD) is not compatible neither with rinse pump (W) nor with water softener (SOFT) versions.

Accessories

CP-16/18

CT-10

CU-7

BASKETS FOR DISHWASHERS

- Manufactured from hygienic polypropylene in several colours, resistant to high temperatures and damage caused by chemical products.
- Moulded from one double-skinned piece which makes them highly resistant to mechanical shocks.
- Designed so that waste cannot be deposited, ensuring absolute hygiene and optimal protection for dishes.
- Ergonomic handle-type openings on all four sides of the racks to facilitate carrying, stacking and un-stacking.
- Available in different sizes and can be used in all glasswasher and dishwasher models.

Model	Reference	Description	For use in	Dimensions (mm)
CP-16/18	**19000487**	Universal 500 x 500 basket	Front Loading and Pass-Through dishwashers	500 x 500 x 110
CT-10	**19104783**	Universal 500 x 500 basket	Front Loading and Pass-Through dishwashers	500 x 500 x 110
CU-7	**19104782**	Cuttlery basket	Front Loading and Pass-Through dishwashers	105 x 105 x 130

KITS FOR DRAINING PUMP

Model	Reference	Description	For use in
ABE-H500	**19104768**	Kit B pump GEX-H500 B	EASY-H500 Pass-Through dishwashers
ABE-H510	**19104769**	Kit B pump GEX-H510 B	EASY-H510 Pass-Through dishwashers
ABT-H	**19104770**	Kit B pump GMX and GTX	MITTE and TECH Pass-Through dishwashers

KITS FOR DETERGENT DISPENSER

Model	Reference	Description	For use in
ADD-H	**19104771**	Kit DD dispenser PT	All Pass-Through dishwashers

ENTRY/ EXIT TABLES FOR PASS-THROUGH DISHWASHERS

- Made of stainless steel.
- 850 mm height with stainless steel height-adjustable feet (-10 mm/+ 50 mm).
- Square section stainless steel legs 40 x 40 mm.
- Welded bowl 500 x 400 x 250 mm with rounded angles for easy and quick cleaning.
- Shower faucet not included but provided with a hole to place it.
- 100 mm splashback.
- Seamless hole for waste bin, totally leveled with the worktop surface.
- Delivered disassembled, quick installation and easy connection to pass-through dishwashers.

Plain table



Model	Reference	Dimensions (mm)
DTC-70	**19104081**	700 x 612 x 850

Plain table with splashback

Dimensions (mm)	Right model	Reference	Left model	Reference
700 x 750 x 850	DTW-70 R	**19104160**	DTW-70 L	**19104159**
1200 x 750 x 850	DTW-120 R	**19104092**	DTW-120 L	**19104011**

Table with bowl with splashback

Dimensions (mm)	Right model	Reference	Left model	Reference
700 x 750 x 850	DTWB-70 R	**19104080**	DTWB-70 L	**19104079**
1200 x 750 x 850	DTWB-120 R	**19104078**	DTWB-120 L	**19104077**

Table with bowl, sorting hole and splashback

Dimensions (mm)	Right model	Reference	Left model	Reference
1200 x 750 x 850	DTWBS-120 R	**19104073**	DTWBS-120 L	**19103986**
1500 x 750 x 850	DTWBS-150 R	**19104075**	DTWBS-150 L	**19104074**

Side closure

Model	Reference	Description
DSC-R	**19104207**	Right side closure
DSC-L	**19104206**	Left side closure

Union element for two hood dishwashers



Model	Reference	Dimensions (mm)
DTJ-14	**19104269**	140 x 750 x 350
DTJ-62	**19104300**	620 x 750 x 350

REPLACEMENT KIT

Reference	Description
19104907	Kit to adapt the old tables to the new 2024 Pass-Through dishwashers

asber

www.asberprofessional.com

ONNERA POLAND Sp. z o.o.
Palmiry
ul. Warszawska 9
05-152 Czosnów
Tel: +48 22 312 00 12
export@onnerapoland.pl

ONNERA GROUP

www.onneragroup.com